

Table of contents

Warnings	2
Introduction	3
General view and pinout	4
Basic specifications	6
Functionality	7
Operating principle	7
Available use cases	8
1. Original internal battery + additional external battery	8
2. Single original internal battery	8
3. Single external battery	8
4. Custom internal battery + additional external battery	8
5. Single custom internal battery	8
External battery connection	9
Distribution of current consumption between batteries	9
Displaying current charge level	9
Batteries charging	10
Recovery current protection	10
Overcurrent protection	12
Internal battery overvoltage protection during charging	12
Emergency internal battery overvoltage protection during charging	12
External battery overvoltage protection during charging	12
Anti-error 24 feature	12
Using 12s+ batteries	13
Installation	14
Wiring sequence	14
Installation process video tutorial	15
Setting up the device	16
Description of parameters	17
Default parameter values	17
Troubleshooting.	18
Warranty and technical support	19

Warnings



WARNING!

Lithium-ion batteries are very dangerous! Improper use of this equipment may cause fire.



WARNING!

Use of this equipment requires at least basic knowledge in electronics and electrical engineering.



WARNING!

When installing this equipment, carefully read and follow the manufacturer's instructions.


Introduction

Here is the “Universal adapter for additional external battery hot-plug connecting” or, in short, Rita.

The first key feature of the device is the ability to connect and disconnect an additional battery at any time, regardless of its charge level and the charge level of the internal battery. It is not necessary to align the battery voltage before connecting an additional battery.

The second key feature of the device is that the additional battery can be not only more charged and have higher voltage because of this, also it can even have a higher voltage configuration, for example 12s or 15s, which can significantly increase the scooter speed, up to 50 km/h

General view and pinout

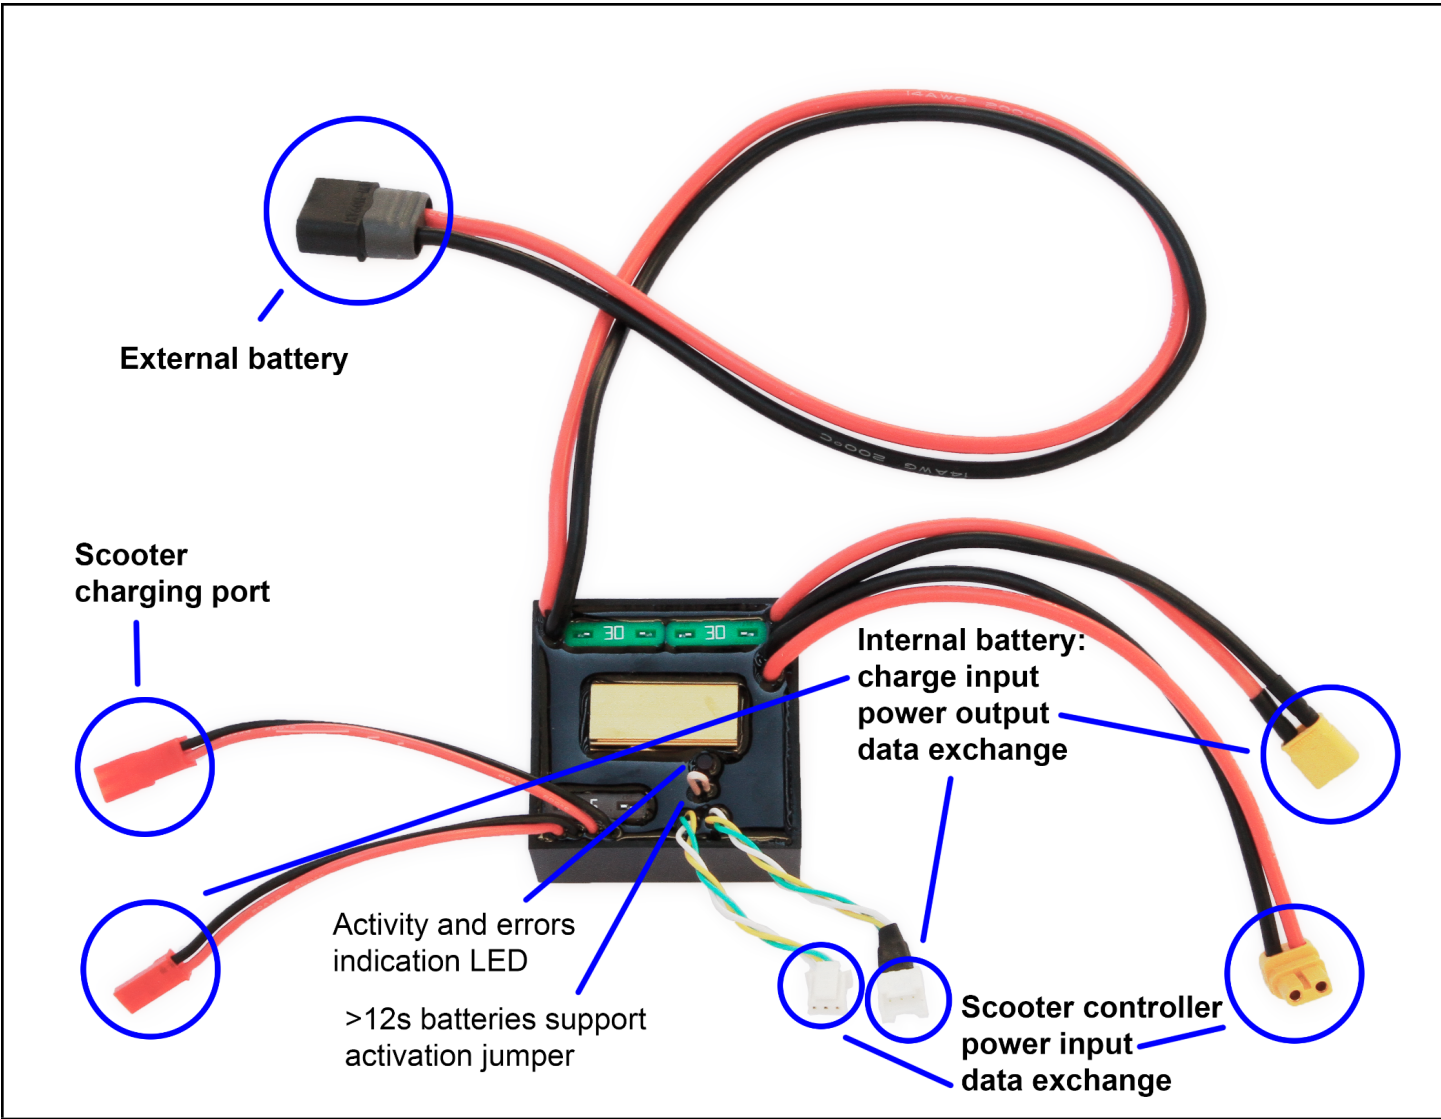

Additional external battery	Pull out of the scooter, connect an additional external battery to this plug.
Scooter charging port	Connect to the charging port of the scooter.
Internal battery: charging input	Connect to the charging port of the internal battery.
Internal battery: data exchange	Connect to the data exchange port of the internal battery.

(continued on the next page)

General view and pinout(continuation)

Internal battery: power output	Connect to the power output of the internal battery.
Scooter controller: power input	Connect to the power input of the scooter controller.
Scooter controller: data exchange	Connect to the data exchange input of the scooter controller.
Activity and error indicator	<p>Blinks a short flash once every 2 seconds when the scooter is turned off and the device is in power saving mode.</p> <p>Blinks a short flash twice a second when the scooter is turned on, and there is an active data exchange with the controller.</p> <p>Glows continuously if there was an emergency voltage surge during energy recovery, until the error will be automatically reset by timeout.</p>
Jumper to activate support of 12s+ batteries	This jumper must be cut off in order to be able to use batteries with voltages more than 51V. DO NOT CUT THIS JUMPER OFF IF THE SCOOTER CONTROLLER IS NOT MODIFIED FOR AN INCREASED VOLTAGE!

Basic specifications


Supported Battery Types	Li-ion with 3.6-3.7V nominal cell voltage
Supported Battery Configurations	10 - 15s*
Maximum possible capacity of an additional battery	No limits
Maximum continuous total discharge current of internal and external batteries, A	25**
Maximum continuous total charge current of internal and external batteries, A	5
Self-consumption of battery current, mA	2

*Installation of above 51V(12s) voltage batteries requires modification of the main scooter controller, as well as the special connection of this adapter. 12s batteries may be used without controller modification and with regular connection of the adapter.

**A few seconds up to 30A peaks are acceptable. Generally it's usually possible to set about 29A battery current in the scooter firmware and use it without any problems.

Functionality

Operating principle

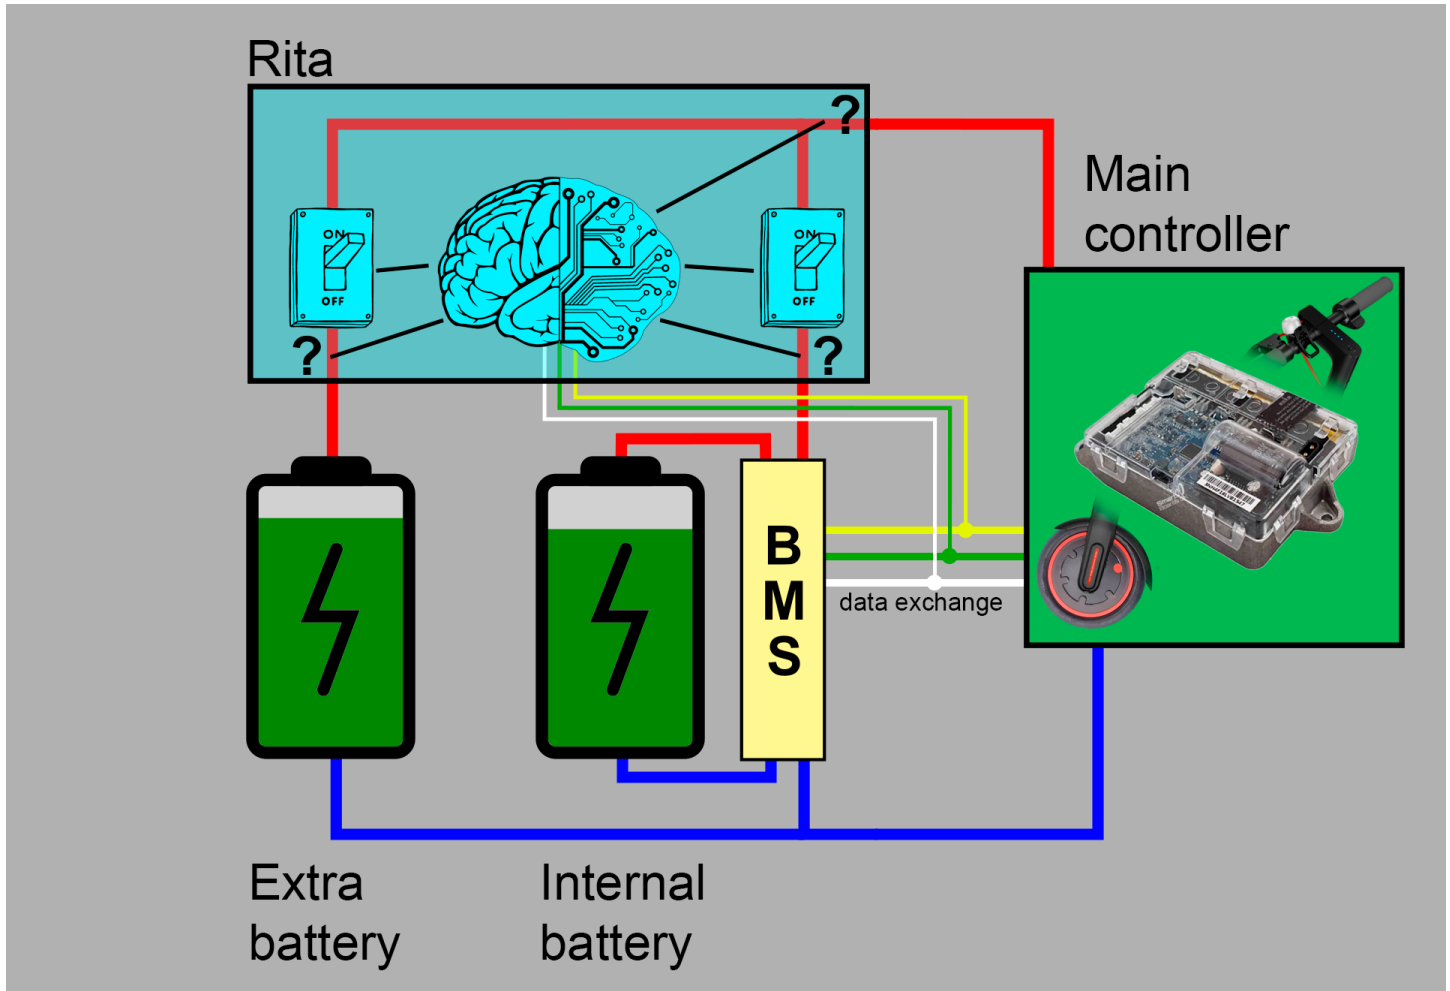

Rita analyzes the voltages of the internal and additional external batteries, and switches their positive power leads so that the charge does not flow from one battery to another, at the same time keeps the ability for the controller to consume current from both batteries and recover energy back when braking.

Besides the commutation of power leads, Rita also takes control of the data exchange lines, and can either transparently pass the exchange between the main controller and the internal battery, or completely replace the exchange, blocking the data flow from the internal battery.

Available use cases

Due to the fact that Rita has full control over power lines and data exchange lines, it provides a wide choice of use cases:

1. Original internal battery + additional external battery

The main case, for which the device was created. The scooter gets an increase in range, as well as an increase in maximum speed, if the additional battery has a higher voltage. Due to the hot plug feature, there is an opportunity to leave the scooter outside, taking only an external battery for recharging.

2. Single original internal battery

In this case the external additional battery is not connected, and the scooter is powered by the original internal battery only. This option is useful to go somewhere nearby. Of course, the range and maximum speed are like a scooter out of the box

3. Single external battery

This case is suitable, for example, if the original battery is broken. Another feature is that the battery can be taken off to carry the scooter by plane.

4. Custom internal battery + additional external battery

This option is very similar to the first one. The difference is that inside is not the original battery, but the custom one, which was installed there to change the broken one, or to increase the capacity / voltage. The feature is that there is no need to use a specialized smart bms for this custom battery - in fact, the device performs as a smart bms emulator, in addition to its main function of connecting an additional battery. As in the first case, due to the hot plug feature, there is an opportunity to leave the scooter outside, taking only an external battery for recharging.

5. Single custom internal battery

The same as the previous option, but without an external additional battery. Here Rita operates as a smart bms emulator.

External battery connection

The additional external battery is connected only with two power wires, without any data lines.

On the one hand, this is convenient because the additional battery may be equipped with the cheapest common port bms.

On the other hand, we don't have information about its current state, for example, the temperature or voltage of each parallel. Therefore, in place of this data, just static numbers are displayed: the temperature is always shown at 20 degrees, and the voltage of the parallels is calculated by simply dividing the total battery voltage by its configuration.

Distribution of current consumption between batteries

If the internal and external batteries have different voltage levels, firstly the current will be consumed from the higher voltage battery, and then, when the voltages are aligned, the current will be consumed from both batteries almost equally.

Displaying current charge level

When calculating the level of the remaining charge, Rita generally does not consider the capacity and configuration of the additional battery, assuming that only the internal battery is connected. Example:

Additional voltage 12s batteries (and its charge level)	Main Battery Voltage 10s (and its charge level)	Displayed charge
50V(100%)	38V(60%)	100%
45V(70%)	38V(60%)	100%
42V(50%)	38V(60%)	100%
40V(30%)	38V(60%)	80%
38V(10%)	38V(60%)	60%
36V(0%)	36V(50%)	50%
0V(0%)	33V(20%)	20%
0V(0%)	30V(0%)	0%

A very notable moment is highlighted in red: in fact, just over 50% of the total charge of both batteries remains, but the scooter displays 100%. It's not convenient, but you can get used to it. This simplification of functionality is also made to reduce the cost of the device.

Batteries charging

Rita allows you to charge the external and internal batteries simultaneously through the standard scooter charge port. That is, you don't need a special charging port at the external battery, or take it off for charging. Just plug the charger into the standard port of the scooter and both batteries will be charged.

If the extra battery with increased voltage is used, a new charger with increased voltage is needed. Use the new charger as usual - just plug it into the scooter charge port and the BMS of the internal battery will stop charging when it reaches 42V, while the additional battery will charge to its own voltage.

But you must be careful and pay your attention that this feature is acceptable for common port BMS equipped batteries only. "Common port BMS" means just one couple of wires sticking out of the battery, which are used for both charging and discharging, while another type, "Separate port BMS" has a dedicated charging input. If your battery has a dedicated charging input, there is a 90% chance it is a separate port BMS equipped. There also is a little 10% chance that the battery BMS is a common port type and charging and discharging plugs are just paralleled.

Separate port BMS equipped batteries can also be charged via Rita and the scooter charging plug, but there is a risk of overcharge, because this separate charge port BMS is not able to interrupt charging on its discharge output. You can leave it as is, and be very careful, understanding that there is a real risk of fire if the battery is disbalanced and some cells groups get overcharged during charging process

Nevertheless it is possible to charge a separate port BMS equipped external battery via it's charging port, not using Rita for distribution charging current from a scooter charge port. In that case you don't use Rita charge plugs at all. You should connect the scooter charging port directly to the original internal battery(as it was connected from a factory), and if you connect it like this the charging current from the scooter charging port will not go to the external battery via its discharge port.

Recovery current protection

When connecting any battery to the Xiaomi M365, you have to remember that the scooter not only consumes current from the battery during acceleration, but also returns the charge back when braking by energy recovery. For the correct operation of the recovery system, the battery must to:

1. Receive the recovery current, which flows from the controller to the battery.
2. Or, if the battery is already fully charged and cannot receive the recovery current, inform the controller to stop the recovery in advance, using the data lines.

If the battery suddenly stops receiving the recovery current without notifying it in advance, this leads to a surge of voltage and the scooter controller gets fried.

When using an additional battery, the problem is that the external battery is connected with only two power wires, and it does not have any data lines to notify the controller in advance that it no longer receives the recovery current.

Rita analyzes the voltage at the output of the device, and if it exceeds a critical level, it detects no path for regenerative current problem and immediately sends the stop recovery command to the controller, but it is not enough: it takes about 100 milliseconds to execute the command, during which the recovery currents have

too much time to fry everything on its path. Therefore, all the time, until the command is executed, the emergency subsystem drains excess voltage to a powerful 25-watt resistor, keeping the voltage within safe limits.

When this system triggers, Rita intercepts the data exchange and sets the temperature sensor to -10 degrees, which causes the scooter to start beeping error 39, drawing the attention of the owner to the malfunction.

The general conclusion about energy recovery: don't worry, everything will work fine, and nothing will get fried, just follow a few simple rules.

- 1. Use high-quality batteries which do not disbalance due to cells characteristics deviation.**
- 2. Equip batteries with a balancing BMS. Check if the charger voltage is sufficient to activate balancing.**
- 3. Pay attention to your battery behavior: if it starts to discharge and charge too quickly, or the range suddenly decreases, it makes sense to check if everything is okay with it. At least check the voltage on each parallel for disbalance.**

Overcurrent protection

Rita maximum allowed continuous discharge current is 25A. A few seconds peaks up to 30A are also acceptable. If the scooter exceeds the limit, Rita emulates the internal battery overheating and a low battery level, so the scooter beeps error 39 and loses power for 30 seconds. If you are faced with such behaviour, you should reduce the controller power, setting less amps in the controller firmware.

Internal battery overvoltage protection during charging

Rita interrupts the internal battery charging if its voltage divided on its serial configuration exceeds 4.2V.

Emergency internal battery overvoltage protection during charging

In addition to the previous feature, Rita is equipped with another independent charging disabling subsystem, which stops both batteries' charging process if the internal battery voltage divided on its serial configuration exceeds 43V. Rita emulates the internal battery overheating, so the scooter beeps error 39, if the protection is triggered.

External battery overvoltage protection during charging

Rita does not provide any external battery protection features. Rita distributes charging current directly to the external battery discharge plug, so the charger must have proper voltage and the external battery must be equipped with a proper BMS which is able to protect it from overcharge. Generally it must be a “common port BMS”, which means just one couple of wires sticking out of the battery, which are used for both charging and discharging. See more information in the [“Batteries charging”](#) section.

Anti-error 24 feature

The scooter controller beeps the error 24 if it detects voltage over 43V - this is a factory feature of Xiaomi/Ninebot scooters. So usually you have to flash the scooter with a custom firmware to disable this error when using a higher voltage battery.

Rita provides a workaround of this problem, allowing users to avoid scooter flashing. The workaround is based on the fact that the controller checks the voltage just once during its switching on, so Rita keeps an external battery disconnected until the scooter is switched on, and connects it only when the scooter is switched on.

Of course this feature does not work if you use a single external battery.

Using 12s+ batteries

The main controller withstands a continuous supply voltage up to 51 V, as well as short voltage surges up to 60 V.

Therefore, the recovery current protection subsystem mentioned above is configured by default to a threshold of 57 V. This guarantees that if the recovery system fails, the voltage on the controller does not exceed the critical level and it will not be damaged.

However, fully charged 15s batteries have a voltage of 63 V, so if you connect such a battery, Rita decides that the recovery has failed, and tries to reduce the voltage to 57 V. It leads to almost instantaneous overheating and explosion, because the built-in resistor is designed only for short-time absorption of recovery currents that last no longer than 100 milliseconds.

Especially for those users who have modified their controller for higher voltages, Rita allows you to raise the emergency protection threshold from 57 V to 67 V. To do this, cut off the red wire-jumper located next to the LED indicator. After this, the use of 15s batteries becomes available, but it is forbidden to use a controller that is not modified for increased voltage, because in case of a failure during the recovery, the protection will be activated too late for it.


Changing the emergency protection threshold is specially made as an inconvenient cutting of the wire so that the user thinks carefully before doing this, and not thoughtlessly changes the settings on the smartphone screen.

Do not forget this:



ATTENTION!

Installation of more than 51V(12s) batteries requires modification of the main scooter controller, as well as the special connection of Rita adapter. 12s batteries may be used without controller modification and with regular connection of the adapter.

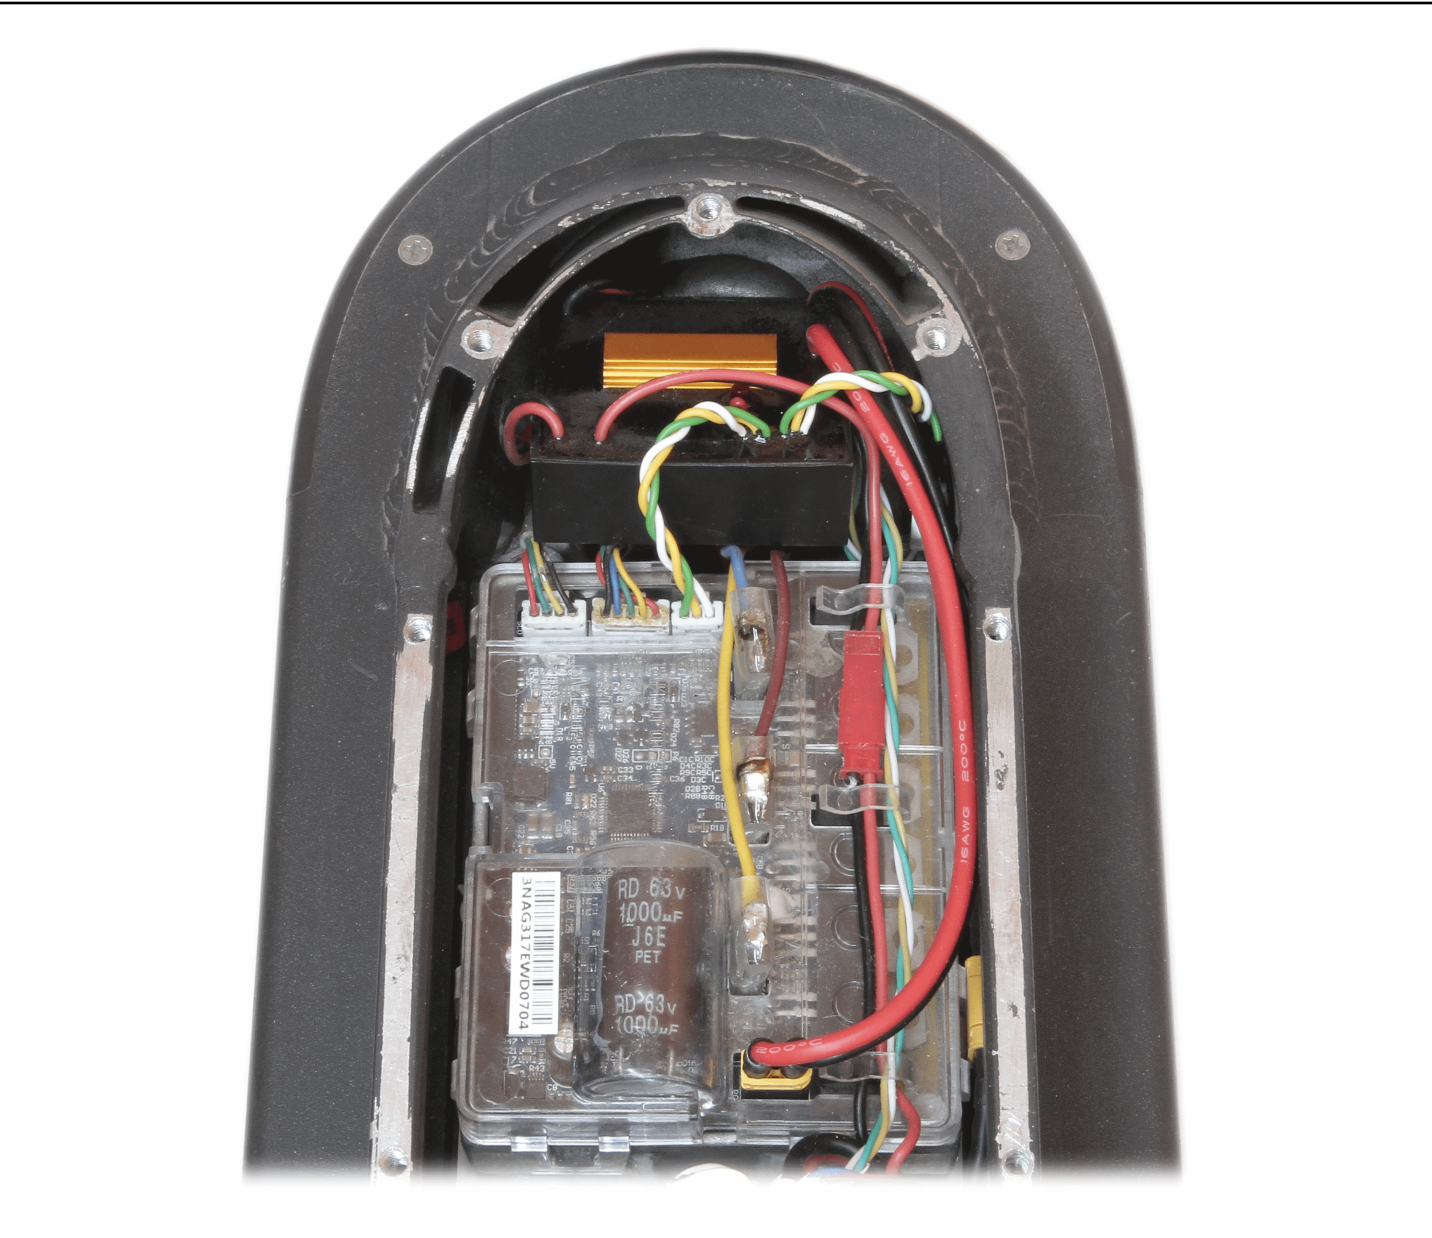

Disconnect the built-in battery
Bring out the plug for co

1. Disconnect the built-in battery: power output, charging input, data line.
2. Bring out the plug for connecting an additional external battery.
3. Connect the charging port of the scooter to the adapter.
4. Connect the power output of the internal battery to the adapter.
5. Connect the charging input of the internal battery to the adapter.
6. Connect the internal battery communication connector to the adapter.
7. Connect the adapter data connector to the scooter controller.
8. Connect the power output of the adapter to the scooter controller.

Installation process video tutorial

[Xiaomi M365/PRO/1S extra battery
installation tutorial](#)



Setting up the device


Please, use the “M365 BMS Tool” application to configure the device:



[Download for Android](#)



[Download for iPhone](#)

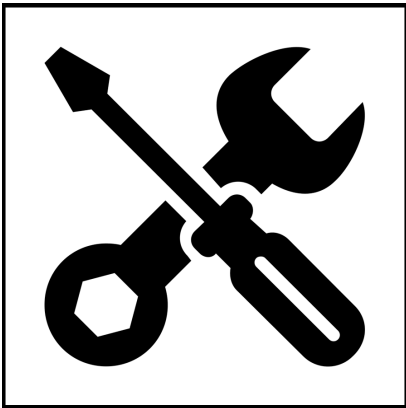

Description of parameters

<i>Parameter</i>	<i>Description</i>
Internal battery capacity, mAh	Internal battery capacity. This value is really does not affect anything and just displayed in applications
External battery capacity, mAh	External battery capacity. This value is really does not affect anything and just displayed in applications
Internal battery configuration	Internal battery configuration. Very important parameter, used for the internal battery overvoltage detection
External battery configuration	Additional battery configuration. Very important parameter, used for charging level calculation

Default parameter values

<i>Parameter</i>	<i>Default value</i>
Internal battery capacity, mAh	29000
External battery capacity, mAh	29000
Internal battery configuration	10
External battery configuration	10

Troubleshooting.

Problem:

Scooter does not brake by the electronic brake and beeps error 39.

Solution:

This behavior usually indicates a battery problem. For more details, see “Functional Description -> Protection against Recovery Currents”.

Warranty and technical support

The warranty period is valid for 1 year from the date of the original purchase.

If you did not find the answer to your question after reading this manual, please, feel free to ask your questions in the special telegram group:

[Xiaomi M365/PRO/1S custom electronics](#)
[by Denis Yurev](#)

